




PRODUCT DESCRIPTION:

- * 100-277V line voltage ;
- * Work without ballast ;
- * Color temperature: 4000K
- * Color Rendering Index: >80 ;
- * Power Factor: >0.95 ;
- * Beam Angle: 140° ;
- * Working Temperature: -20~45°C ;
- * LED Type: SMD2835 ;
- * Lifespan: 50,000hours ;



Model	Watt	Length	Voltage	End cap	Lifespan	Luminous	Beam angle	CCT	CRI	Power factor
	W	mm	Vac		hrs	lm	°	K		
ARK/TA/22K12	22	1200	100-277	G5	50,000	140lm/W±10%	140	4000	>80	>0.95

ACCESSORIES MAP

- A. Internal Driver
- B. Driver Case
- C. Aluminim Layer
- D. Sillicone thermal
- E. LED PCB
- F. SMD LED
- G. PC Cover
- H. Aluminum Housing

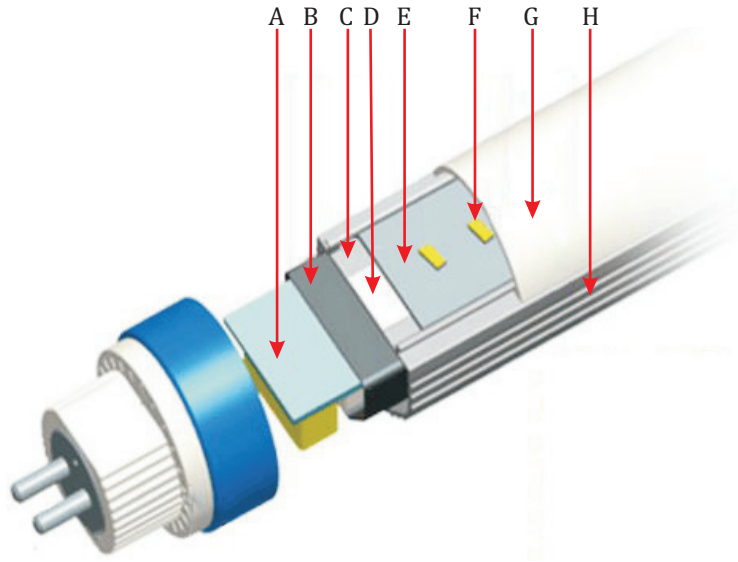


CCT RANGE AND PC COVER

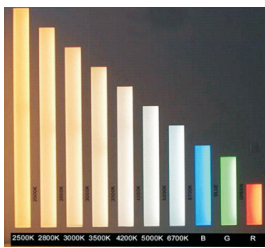

Milky cover

- WW(3000-3500K)
- NW(4000-4500K)
- DW(5000-5500K)
- CW(6000-6500K)

DIMENSIONS

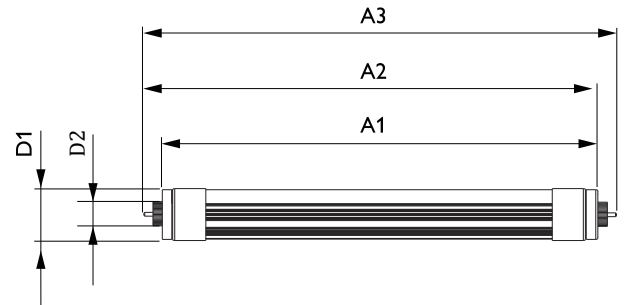

Length	A1(mm)	A2(mm)	A3(mm)	D1(mm)	D2(mm)
1200	1149	1156	1163	23	17

PACKING



LED tube length	L(cm)	H(cm)	W(cm)	Q'ty/CTN	N.W(KG)	G.W(KG)
1200mm 4FT	123	16	16	25	7.5	8.5